


NEW!

PERFORMANCE • PRICE • PARTNERING • PRODUCT
PARTNERSHIP • PROFESSIONAL SUPPORT 24/7 • PRICE

High Velocity[®] In-Bay Pumping Station

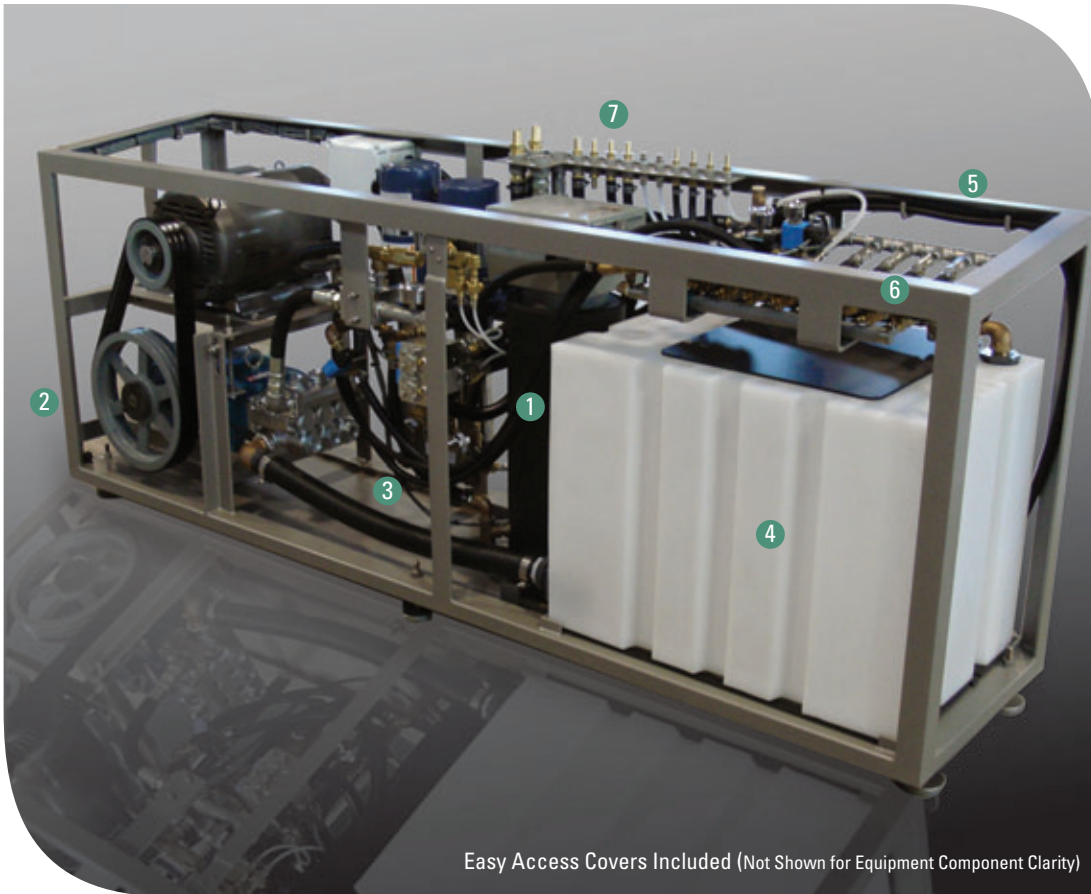

Easy Access Covers Included (Not Shown for Equipment Component Clarity)

The Washworld High Velocity[®] Touch Free In-Bay Automatic Wash is now available for locations without an equipment room. Cutting edge technology is incorporated in a space saving frame designed to be located directly in your wash bay. Featuring one piece heavy duty construction and designed for long life in even the harshest of conditions, Washworld continues to lead the way in customer value.

WASHWORLD[®]

1755 E. Matthew Drive | DePere, WI 54115
920.338.9278 | 888.315.7253
www.washworldinc.com

STANDARD FEATURES

- Space Saving Design, Simple Installation, Easy to Maintain
- Deluxe Cover Package Protects Equipment and Looks Great in your Bay
- Removeable Panels Allow for Complete Access and Easy Maintenance
- Heavy Duty Powder Coated Frame Utilizes Proven Protective Primer
- CAT 3535 Pump with Deluxe Oil Change Kit Allows Easy Access for Service
- Resource Conservation System Saves Utility and Chemical Costs
- Modem with Fault Paging
- Direct Feed Solutions System Provides More Control
- Wash View Controller with Exclusive Wash View[™] Remote Software


OPTIONS

- Built In High Capacity 12kw Electric Pre-Soak Heater
- Cold Climate Heat Package
- Spot Free Re-pressurization Pump
- Tri-Color Foam Application System
- Flex Pass Speed Package
- Overhead Door Control Packages
- Reclaim System Adapter Kit

FEATURES

- 1 Optional Pre-soak Heater
- 2 Easy Access & Oil Change
- 3 Enclosed Base
- 4 Poly Tank (Corrosion Proof)
- 5 3 Pre-soaks Standard
- 6 Powder-coated Frame
- 7 Top Feed & Discharge

High Velocity® In-Bay Pumping Station

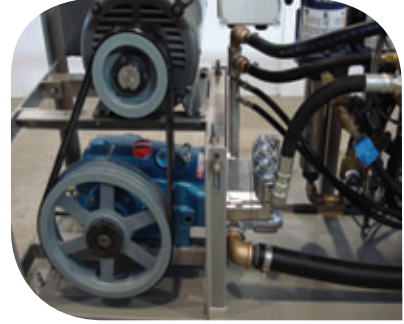

SPECIFICATIONS

Building Dimensions (*Does not include dryer, obstructions, etc.*)

Height	Wall Mount	10'-4" minimum (<i>custom</i>) 11'-4" standard
	Floor Mount	11'-4" standard
Width	Wall Mount	15'-0" minimum to 18'-0 maximum
	Floor Mount	15'-0" minimum (<i>no maximum</i>)
Length	Wall Mount	24'-10" minimum w/optional 24' rails
	Floor Mount	26'-10" minimum w/ standard 26' rails
	On Board Dryer	29'- 6" minimum w/ optional 28' 8" rails
	Unit Size	8'- 3" long x 3'-5" high x 2'- 0" deep

HIGH VELOCITY IN-BAY SYSTEM UTILITY REQUIREMENTS

Utility Requirements (*Does not include dryer, RO, etc.*)

Air	11 CFM @ 100 PSI minimum (<i>with optional Triple Foam</i>)			
Water	25 GPM @ 35 PSI minimum at pump station			
Electrical	All voltages 3 phase, 4 wire (<i>neutral and ground</i>)			
<u>Voltage</u>	<u>UCC Cabinet</u>	<u>High Velocity® In Bay Pump Station</u>	<u>Optional Cold* Climate Package</u>	<u>Optional** Pre-soak Heater</u>
208	23 Amps	73 Amps	18 Amps	32 Amps
230	20 Amps	62 Amps	16 Amps	n/a
460	n/a	31 Amps	n/a	n/a

* Perimeter heated frame option included

** High capacity 5 Gal, 12 kw fast recovery electric pre-soak heater

Note: Specifications Subject to Change Without Notice.



1755 E. Matthew Drive | DePere, WI 54115

920.338.9278 | 888.315.7253

www.washworldinc.com