

PERFORMANCE • PRICE • PARTNERING • PRODUCT  
PARTNERING • PROFESSIONAL SUPPORT 24/7 • PRICE

# High Velocity® Automatic Touch Free Vehicle Wash Systems



The Washworld High Velocity® Touch Free In-Bay Automatic Wash is truly the best of all worlds. Cutting-edge technology and proven performance are at a price you simply cannot beat. With dozens of standard features, premium components, factory testing and 24/7 technical support, Washworld leads the way.



1755 E. Matthew Drive | De Pere, WI 54115

920.338.9278 | 888.315.7253

[www.washworldinc.com](http://www.washworldinc.com)

## STANDARD FEATURES



- Virtual Attendant® - Like Having an Attendant at your Wash 24/7
- Washview® Controller w/Exclusive Washview Remote™ Software Includes Alert Paging
- All Stainless Steel Wall Mounts, Rails, Carriage & Trolley Assemblies
- Direct Drive Utilizing Variable Frequency Technology
- Pumping Station w/ Either CAT or General Pump
- ETL/ETLc/CAN/CSA STD. C22.2 NO. 14/CE Approved
- Eco-Friendly Resource Conservation System
- Adjustable Pressure Under Body and Rocker Blasters
- Direct Feed Solutions System w/3 Step Presoak
- Triple Pass Technology for Optimal Front and Rear Cleaning
- Washes Smart Cars Up to Quad-Cab Duallies-No Special Programming Required
- Comprehensive Integrated Security System-Can Monitor Auto Cashiers, Doors, Fluid Levels, etc.
- Wash Activation Buy-Up Compatible

## OPTIONS

- Flex-Pass System - Increases Thru-put
- VS<sup>2</sup>® (Vehicle Sizing System) - Treadleless Design
- Premium or Ultimate Door Control Systems
- Free Standing Frame
- Cold Climate Package
- Tri-Color Foam System
- Programmable Intake Source-Reclaim/RO Reject/Hot Water
- Unique or Custom Graphics

© 2008 Washworld Inc.

## High Velocity® Automatic Touch Free Vehicle Wash Systems

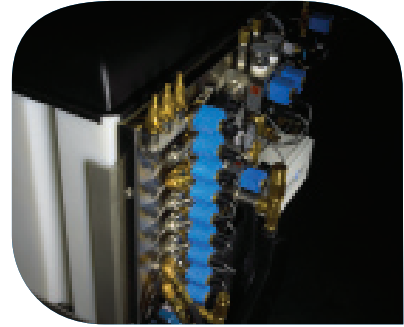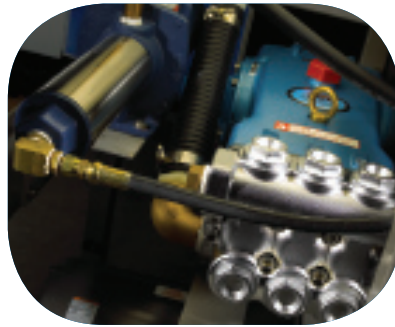

### SPECIFICATIONS

Equipment Envelope Requirements (*Does not include dryer, obstructions, etc.*)

|               |                          |  |
|---------------|--------------------------|--|
| <b>Height</b> | Wall Mount . . . . .     | 10'-4" minimum ( <i>custom</i> ) 11'-4" standard |
|               | Floor Mount . . . . .    | 11'-4" standard                                  |
| <b>Width</b>  | Wall Mount . . . . .     | 13'-4" minimum to 18'-0 maximum                  |
|               | Floor Mount . . . . .    | 14'-0" minimum ( <i>no maximum</i> )             |
| <b>Length</b> | Wall Mount . . . . .     | 24'-10" minimum w/optional 24' Rails*            |
|               | Floor Mount . . . . .    | 26'-10" minimum w/ standard 26' Rails*           |
|               | On Board Dryer . . . . . | 29'- 6" minimum w/ optional 28' 8" Rails*        |

\* VS2 System requires an additional 8 inches of bay length

### HIGH VELOCITY UTILITY REQUIREMENTS

Utility Requirements (*Does not include dryer, RO, etc.*)

|                   |   |
|-------------------|---|
| <b>Air</b>        | 11 CFM @ 100 PSI minimum ( <i>with optional Triple Foam</i> ) |
| <b>Water</b>      | 25 GPM @ 35 PSI minimum at pump station                       |
| <b>Electrical</b> | All voltages 3 phase, 4 wire ( <i>neutral and ground</i> )    |

| <u>Voltage</u> | <u>UCC Cabinet</u> | <u>High Velocity®<br/>Pump Station</u> | <u>Optional Cold<br/>Climate Package</u> |
|----------------|--------------------|--|--|
| 208            | 23 Amps            | 73 Amps                                | 14 Amps                                  |
| 230            | 20 Amps            | 62 Amps                                | 12 Amps                                  |
| 460            | N/A                | 31 Amps                                | N/A                                      |

*Note: Specifications Subject to Change Without Notice.*



1755 E. Matthew Drive | De Pere, WI 54115  
 920.338.9278 | 888.315.7253  
[www.washworldinc.com](http://www.washworldinc.com)